


ADD+GARDS

COMMERCIAL PRODUCTS

UNIVERSAL SPECIFICATION SHEET

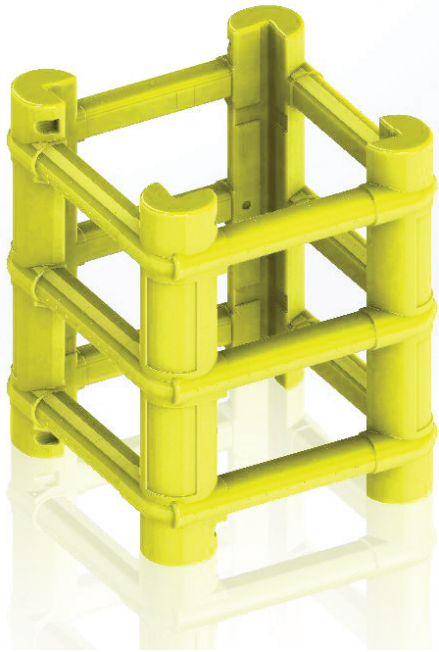

PRODUCT SPECIFICATION

APPLICATION

ENVIRONMENT:

Column Protectors filled with air for controlled impact absorption, made from highly flexible, strong, low density polyethylene. Column protectors prevent damage to columns and pillars in warehouses, car parks etc and also to the vehicle or equipment that may have collided with it. Stackable for higher protection if required.

ADVISORY SPEED:

3.1km/h for gross weight vehicle of 2500 kg
2.1km/h for gross weight vehicle of 5000 kg

MATERIAL


STRAPS / FIXATIONS:

Linear low density Polyethylene, high visibility UV Resistant- Fire class HB* - non-conductive - impervious to most chemical products.

COLOURS:

Yellow

REQUIREMENTS, MAXIMUM PILLAR DIMENSIONS:

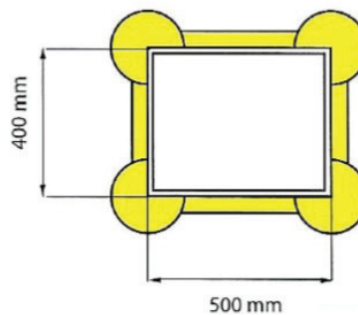



Sample column size
400mm x 500mm:

ENVIRONMENT:

Suitable for indoor and outdoor use

WORKING TEMPERATURES:

-15°C up to +40°C

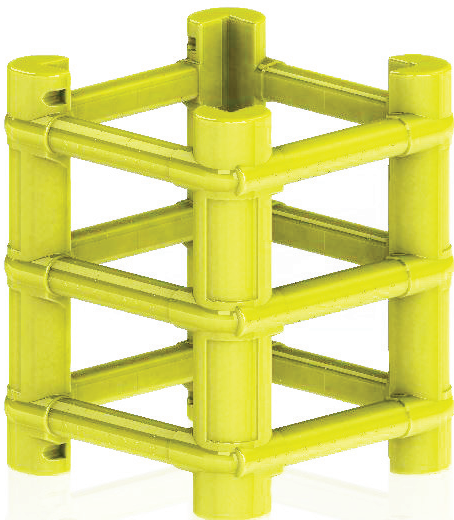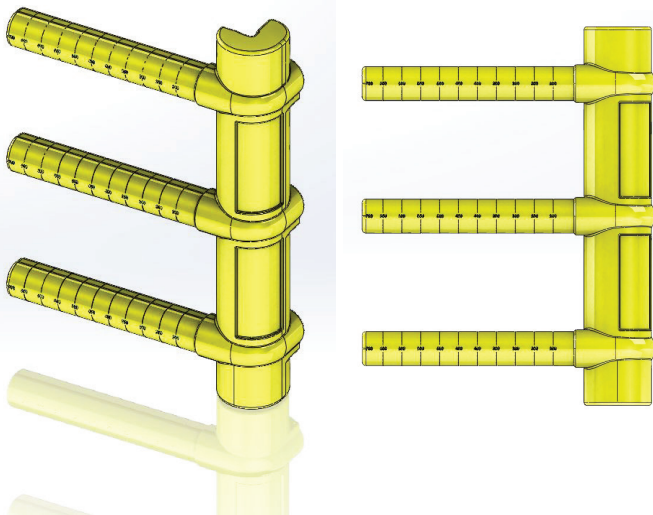

FEATURES AND FUNCTIONALITY

SIZE:

DIMENSION PER QUARTER SECTION:

Suitable for columns
200mm up to 700mm
squared

700mm long x 90mm deep

WEIGHT:

16kg

HEIGHT:

1 Metre

IMPACT PERFORMANCE:

TEST CONDITIONS:

Ambient
temperature

Forklift Weight

Success Criteria

20° Celcius

2300kg

No permanent
damage of the
protector

90° IMPACT:

Maximum Impact:

2100 Joule

45° IMPACT:

Maximum Impact:

3100 Joule

UNIVERSAL SPECIFICATIONS:

